


PROTIM 265 WOOD PRESERVATIVE

PROTIM 265 is a solvent-borne ready to use wood preservative for the treatment of new and existing timber. It contains active ingredients effective for preventing and eradicating wood destroying fungi (including dry rot) and wood boring insects. For application on all exterior timber, which is not in direct contact with the ground or surface water, e.g.: joists, end grains, fences, sheds etc. The product is tinted for ease of identification of treated areas.

**SOLVENT BASED
TRIPLE ACTION
DEEP PENETRATING
PREVENTS DRY & WET ROT
KILLS WOODWORM
STOPS REINFESTATION**

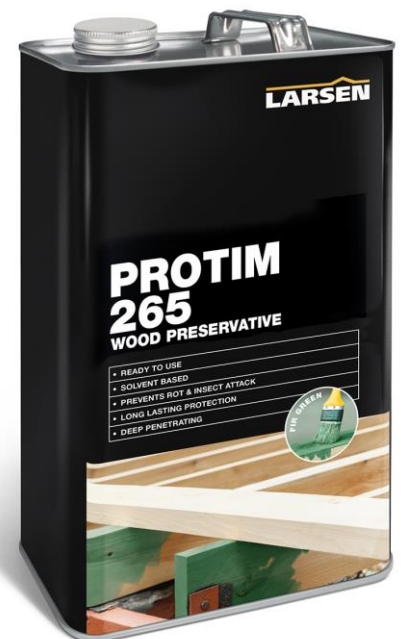

TECHNICAL INFORMATION

PRODUCT INFORMATION	
FORM:	Solvent based Liquid
COLOUR:	Clear, Green or Brown
HAZARD INFORMATION:	WARNING. May be fatal if swallowed and enters airways. May cause an allergic skin reaction. Very toxic to aquatic life with long lasting effects. UN 3082
CLEANING:	Clean tools immediately after use with a commercial brush cleaner or thinners
PACKAGING:	1L, 2.5L, 5L, 25L
STORAGE CONDITIONS:	Protect from frost and below 30°C. Store in a safe place away from food or feed stuffs.
SHELF LIFE:	Minimum 24 months in unopened manufacturer's packaging
APPLICATION INFORMATION	
ACTIVE	CONTAINS Propiconazole 7.47g/L, Permethrin 1.45g/L
APPLICATION RATE:	125-333ml/m² 1L per 3-8m ²
APPLICATION METHOD:	Low pressure spray, brush, roller or dipping. (Immersion method only for professional or industrial users)
APPLICATION TEMPERATURE:	+5°C to +30°C
DRYING TIME:	24-48 hr
OVERCOAT:	After at least 24-48 hrs
UK AUTHORISATION	HSE 8281
ROI AUTHORISATION	PCS 98585

DIRECTIONS FOR USE

PREPARATION

Wood should be clean, dry and free from wood dust, paint, varnish and other contaminants which may prevent penetration. If necessary, all deteriorated wood should be removed and surface sanded down to a clean, sound surface.

APPLICATION

Supplied ready for use, do not dilute. Apply by suitable spray, roller or brush at a rate of 1L per 3-8m².

Alternatively, fully immerse for a minimum of 3min. (Immersion method only for professional or industrial users)

DRYING

Product is touch dry in 24-48 hours depending on wood and ambient conditions.

Allow at least 24-48 hours before overcoating or application of subsequent top coats.

RESTRICTIONS

Product colour is for identification only and is not designed as a lasting decorative wood stain. Odour can linger. If used internally, consideration should be given to ensure sufficient ventilation exists and that habitable areas can remain vacated until odour has dissipated. Alternatively, use Larsen Low Odour Universal Wood Preservative on internal timber.

STATUTORY CONDITIONS OF APPROVAL RELATING TO USE :

FOR USE ONLY AS A WOOD PRESERVATIVE. Apply by brush or roller at a rate of 1L per 3-8 m². Users must comply in full with all their legal responsibilities under The Control of Pesticide Regulations 1986 (as amended), including complying with all conditions of approval. This product is approved under The Control of Pesticides Regulations 1986 (as amended) for use as directed. **READ ALL PRECAUTIONS BEFORE USE**

PRECAUTIONS

This material and its container must be disposed of in a safe way. Do not contaminate foodstuffs, eating utensils or food contact surfaces. Unprotected persons and animals should be kept away from treated areas for 48 hours or until surfaces are dry. Avoid all contact with plant life. Cover all water storage tanks before application. All bats are protected under the wildlife and countryside act 1981. Before treating any structure used by bats, consult natural England, Scottish natural heritage or the countryside council for Wales. Hazardous to bees. Do not use on beehives or beekeeping equipment. Wash hands and exposed skin before meals and after use. Keep in a safe place

QUALITY

This product is manufactured in a plant controlled under an integrated management system third party certified to BS EN ISO 9001.

Use biocides safely. Always read the label and product information before use.

Marketed by:
Protim Solignum Ltd
Fieldhouse Lane
Marlow
SL7 1LS

Manufactured under licence and distributed by:
Larsen Building Products
Tel: +44 (0)28 90774000
www.larsenbuildingproducts.com