# **Country Stone**

### Rugged stone effect.

Country Stone has a nostalgic appearance, with a rugged finish emulating the distinct aesthetics of natural stone.

- Emulates natural stone
- Vibrant long-lasting colours
- Creates a classic, vintage look

375 x 100 x 140mm	
240 x 100 x 140mm	225 x 100 x 140mm
200 x 100 x 140mm	160 x 100 x 140mm

Sizes (all in one pack)

Ef-Stop<sup>\*</sup>






tobermore.co.uk

**Ef-Stop**<sup>®</sup>



## Country Stone

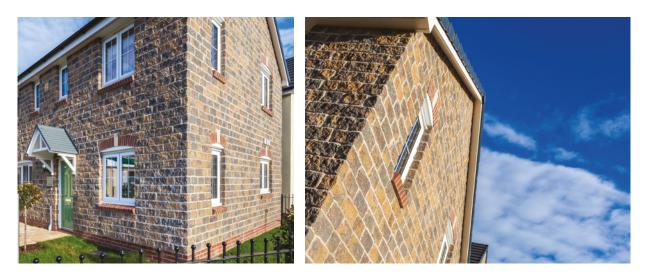

### Specification

-	
Product type	Concrete Block
Manufactured to	BS EN 771-5:2011
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Compressive strength > 20N/mm <sup>2</sup> mean
Installed to	BS 5628-3:2005
Shrinkage (Moisture Movement)	0.41mm/m
Durability (Freeze/Thaw)	F2 (Severe Exposure)
Tolerances	Category D1
Reaction to fire	A1
Water absorption by capillary	
Water absorption	<7% water absorption on average
Water vapour diffusion coefficient	30/100 µ
Net dry density	2210 kg/m <sup>3</sup>
Gross dry density	2200 kg/m <sup>3</sup>
Shear bond strength	0.15N/mm <sup>2</sup>
Thermal Conductivity	Protected 1.25W/m K Exposed 1.43W/m K
Mortars & Expansion Joints	Refer to BS 5628-3:2005
Bed Reinforcement	Refer to BS 5628-3:2005
N55	Plus F10 295 Create 45-80-50/322
Applications	Above ground, main external wall construction, boundary walls, columns and partitions.
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon footprint	36kgCo <sup>2</sup> e/m <sup>2</sup>
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A+, according to the Green Guide to Specification, 4th Edition 2009.
Tobormoro products are manufactured	in accordance with an accordited ISO 9001-2015 Outlity Management. Manufacturing facilities are accordited to ISO14001-2015

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

#### Contact Us

GB: 0844 800 5736 NI: 028 7964 2411 ROI: 048 7964 2411

### Email

technical@tobermore.co.uk sales@tobermore.co.uk tobermore.co.uk



## Country Stone



### Stock

product	size (mm)	colours available	in stock	m² per pack	m² per slice	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Country Stone</b> (single course mixed length) (all sizes in one pack)	375 x 100 x 140 225 x 100 x 140 160 x 100 x 140 240 x 100 x 140 200 x 100 x 140	Bracken, Heather, Slate	YES	6.72	1.34	40 40 40 40	1560	1560
Country Stone Coping	208 x 300 x 80	Bracken, Heather, Slate	YES	-	-	128	1416	1416

### Heather

Bracken



#### Email technical@tobermore.co.uk sales@tobermore.co.uk

tobermore.co.uk